


Inox Forniture

Codice 616

Riduzione concentrica a saldare ricavata da tubo elettrounito

- Materiale: Disponibile sia in AISI 304 che in AISI 316
- Concentric welding reducer - Butt welding fitting

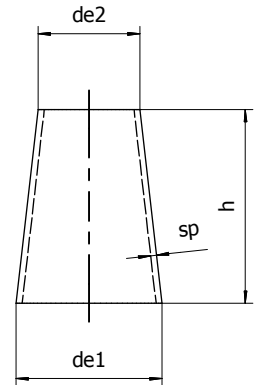


Diametro esterno			Spessore mm. (Sp)	Diametro esterno			h
DN	Pollici	mm. (de1)		DN	Pollici	mm. (de2)	
15	1/2	21,3	2	10	3/8	17,2	28
			3				
20	3/4	26,9	2	15	1/2	21,3	38
			3				
25	1	33,7	2	15	1/2	21,3	51
			3				
			2	20	3/4	26,9	
			3				
32	1 1/4	42,4	2	15	1/2	21,3	21,3
			3				
			2	20	3/4	26,9	
			3				
40	1 1/2	48,3	2	20	3/4	26,9	64
			3				
			2	25	1	33,7	
			3				
50	2	60,3	2	25	1	33,7	76
			3				
			2	32	1 1/4	42,4	
			3				
65	2 1/2	76,1	2	32	1 1/4	42,4	89
			3				
			2	40	1 1/2	48,3	
			3				
80	3	88,9	2	40	1 1/2	48,3	89
			3				
			2	50	2	60,3	
			3				
			2	65	2 1/2	76,1	
			3				



Codice 616

Riduzione concentrica a saldare ricavata da tubo elettrounito

- Materiale: Disponibile sia in AISI 304 che in AISI 316
- Concentric welding reducer - Butt welding fitting

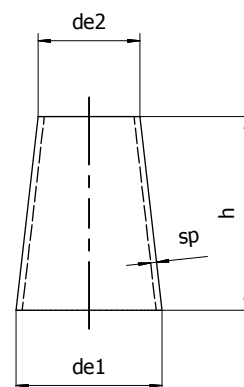

Diametro esterno			Spessore mm. (Sp)	Diametro esterno			h
DN	Pollici	mm. (de1)		DN	Pollici	mm. (de2)	
100	4	114,3	2	50	2	60,3	102
			3				
			2				
			3				
125	5	139,7	2	65	2 1/2	76,1	127
			3				
			2				
			3				
150	6	168,3	2	80	3	88,9	140
			3				
			2				
			3				
200	8	219,1	2	100	4	114,3	152
			3				
			2				
			3				
			2				
			3				
250	10	273	2	150	6	168,3	178
			3				
			2				
			3				
300	12	323,9	2	200	8	219,1	203
			3				
			2				
			3				
			2	250	10	273	
			3				

