


Codice 666
Riduzione concentrica senza saldatura SCH 10S

- Materiale: Disponibile sia in AISI 304 che in AISI 316
- Seamless concentric reducers SCH 10S



Estremità 1			Estremità 2			Lunghezza mm. (a)
Pollici	mm. (de1)	Spessore mm. (Sp1)	Pollici	mm. (de2)	Spessore mm. (Sp2)	
3/4	26,67	2,11	1/2	21,34	2,11	38,1
1	33,40	2,77	1/2	21,34	2,11	50,8
1	33,40	2,77	3/4	26,67	2,11	50,8
1 1/4	42,16	2,77	3/4	26,67	2,11	50,8
1 1/4	42,16	2,77	1	33,40	2,77	50,8
1 1/2	48,26	2,77	3/4	26,67	2,11	63,5
1 1/2	48,26	2,77	1	33,40	2,77	63,5
1 1/2	48,26	2,77	1 1/4	42,16	2,77	63,5
2	60,33	2,77	1	33,40	2,77	76,1
2	60,33	2,77	1 1/4	42,16	2,77	76,1
2	60,33	2,77	1 1/2	48,26	2,77	76,1
2 1/2	73,03	3,05	1 1/2	48,26	2,77	88,9
2 1/2	73,03	3,05	2	60,33	2,77	88,9
3	88,90	3,05	1 1/2	48,26	2,77	88,9
3	88,90	3,05	2	60,33	2,77	88,9
3	88,90	3,05	2 1/2	73,03	3,05	88,9
4	114,30	3,05	2	60,33	2,77	101,6
4	114,30	3,05	2 1/2	73,03	3,05	101,6
4	114,30	3,05	3	88,90	3,05	101,6
5	141,30	3,40	3	88,90	3,05	127,0
5	141,30	3,40	4	114,30	3,05	105,0
6	168,28	3,40	4	114,30	3,05	140,0
6	168,28	3,40	5	141,30	3,40	140,0
8	219,08	3,76	4	114,30	3,05	152,0
8	219,08	3,76	5	141,30	3,40	152,0
8	219,08	3,76	6	168,28	3,40	152,0

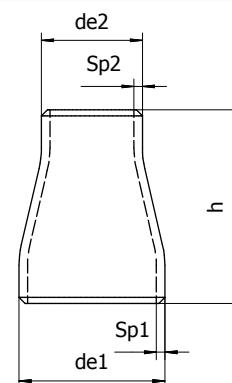